



MJUNT - Fino 0-4 mm


PRESENTATION

MJUNT FINO is a putty of high technical quality to seal joints on ceramics walls tiles or pavements of gres floor tiles - porcelain tiles - glass mosaics - porous wall tiles - terracotta. Interior, exterior and swimming pools uses. Recommended for joints of 0 to 4 mm.

Technical Characteristics - Apparent Density: 1,2 kg/dm³ - Ashes at 450° C.: 96,8 ± 2,0% - Ashes at 900° C.: 67,3 ± 2,0% - pH (100% distilled water): 12,5 - Stand by after mixing: 5 minutes - Open time: ± 2 hours - Setting time: - on walls: 1 day - on pavements: 1 to 4 days - Not flammable. Composition - Cement. - Fillers. - Polymers. - Correctors. - High quality resistant inorganic pigments. Supports - Ceramic Tiles - Grès ceramic. - Porcelanic gres - Glass ceramic (gresite) - To fill wall cracks. - Swimming pools	Mixing water Aprox. 30% ± 1% Paste Aprox. 34% ± 1% Paste fluid Mixing Approx. 25% (7-8 kg) per bag 30kg Tools - Electric driller (500r.p.m.) - Hard rubber spatula - Flexible rubber spatula. - Sponge for cleaning. Packaging Bag of 5 kgs, boxes of 25 kgs. Palets of 30 boxes : 750 kgs. Types MJUNT: for joint 0 to 4 mm. Storage Closed bag : One year Protect from rain and humidity.
---	---



Packaging 5 kg

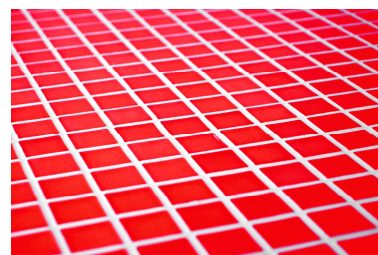

RULES FOR APPLICATION

- Well mix the product until obtaining an homogenous and creamy paste. Wait for 5 minutes before applying.
- Apply **MJUNT** approximatively after 24 hours of fixing ceramic tiles.
- Fill deeply gaps between each tiles
- Apply in temperatures between 5°C and 30°C
- During hot weather, wet previously joints to be filled.
- Use **MJUNT-POROUS CONTROL** on very absorvent porous tiles for easy cleaning and on porcelanic gres to avoid possibilities of shades..
- Clean after 24 hours surface grouted with the help of wetted sponge and dry cloth material..
- To eliminate any patches, shades, etc.. use our **DETERCAL** for cleaning.

APPROXIMATE CONSUMPTION:

	Dimension cm	Tickness mm	Consumption M Junt Universal (kg/m ²)		
			Joint dimension		
<i>Supports</i>			1 mm	2 mm	3 mm
<i>Glass mosaics & ceramics</i>	2 x 2	4	0,7	1,4	2,1
	2,5 x 2,5		0,7	1,1	1,8
	5 x 5		0,4	0,6	0,9
<i>Gres floor tiles Porous wall tiles Porcelain tiles Marble Natural stone</i>	10 x 10	6	0,3	0,4	0,6
	10 x 20		0,2	0,3	0,5
	10 x 10		0,3	0,4	0,6
	15 x 15		0,2	0,3	0,4
	20 x 20		0,2	0,4	0,5
	20 x 30		0,1	0,3	0,4
<i>Porous single-fired Porcelain tiles Marble Natural stone</i>	25 x 33	8	0,1	0,2	0,3
	10 x 20	9	0,3	0,5	0,8
	20 x 25		0,1	0,3	0,4
	30 x 30		0,1	0,2	0,3



NOTA: Los Consejos están dados de buena fe y están basados en los resultados obtenidos de una larga experiencia, y de nuestros tests de laboratorio.-
Como las condiciones de aplicación están fuera de nuestro control, ninguna responsabilidad puede ser aceptada por nuestra parte por una incorrecta utilización de nuestro producto.
ECOLANIC se reserva el derecho a realizar cambios en los datos relacionados, siempre que lo considere oportuno, sin previo aviso.